

FINISH HARD TURNING UP TO PART Ø 610 mm

MIKROTURN® 100 MACHINE SERIES




About finish hard turning

Finish hard turning refers to the process of single point cutting of hardened pieces within the 2 µm range having hardness between 55 and 70 HRC. It is a simple and reliable process that offers many advantages, especially for multi surface workpieces with complex shapes and a combination of OD and ID machining.

The process is also easy to set up and change over making it very suitable for manufacturers of small to medium-sized production runs over a wide variety of workpiece types.

Finish hard turning means

- Soft turn & hard turn on a single machine
- High metal removal rates leading to low cycle times
- Machining complex shapes and perform multiple operations in one set-up saving process steps
- Simple process set-up & change overs with standard tooling only
- A dry and environmental process due to the absence of machining fluids

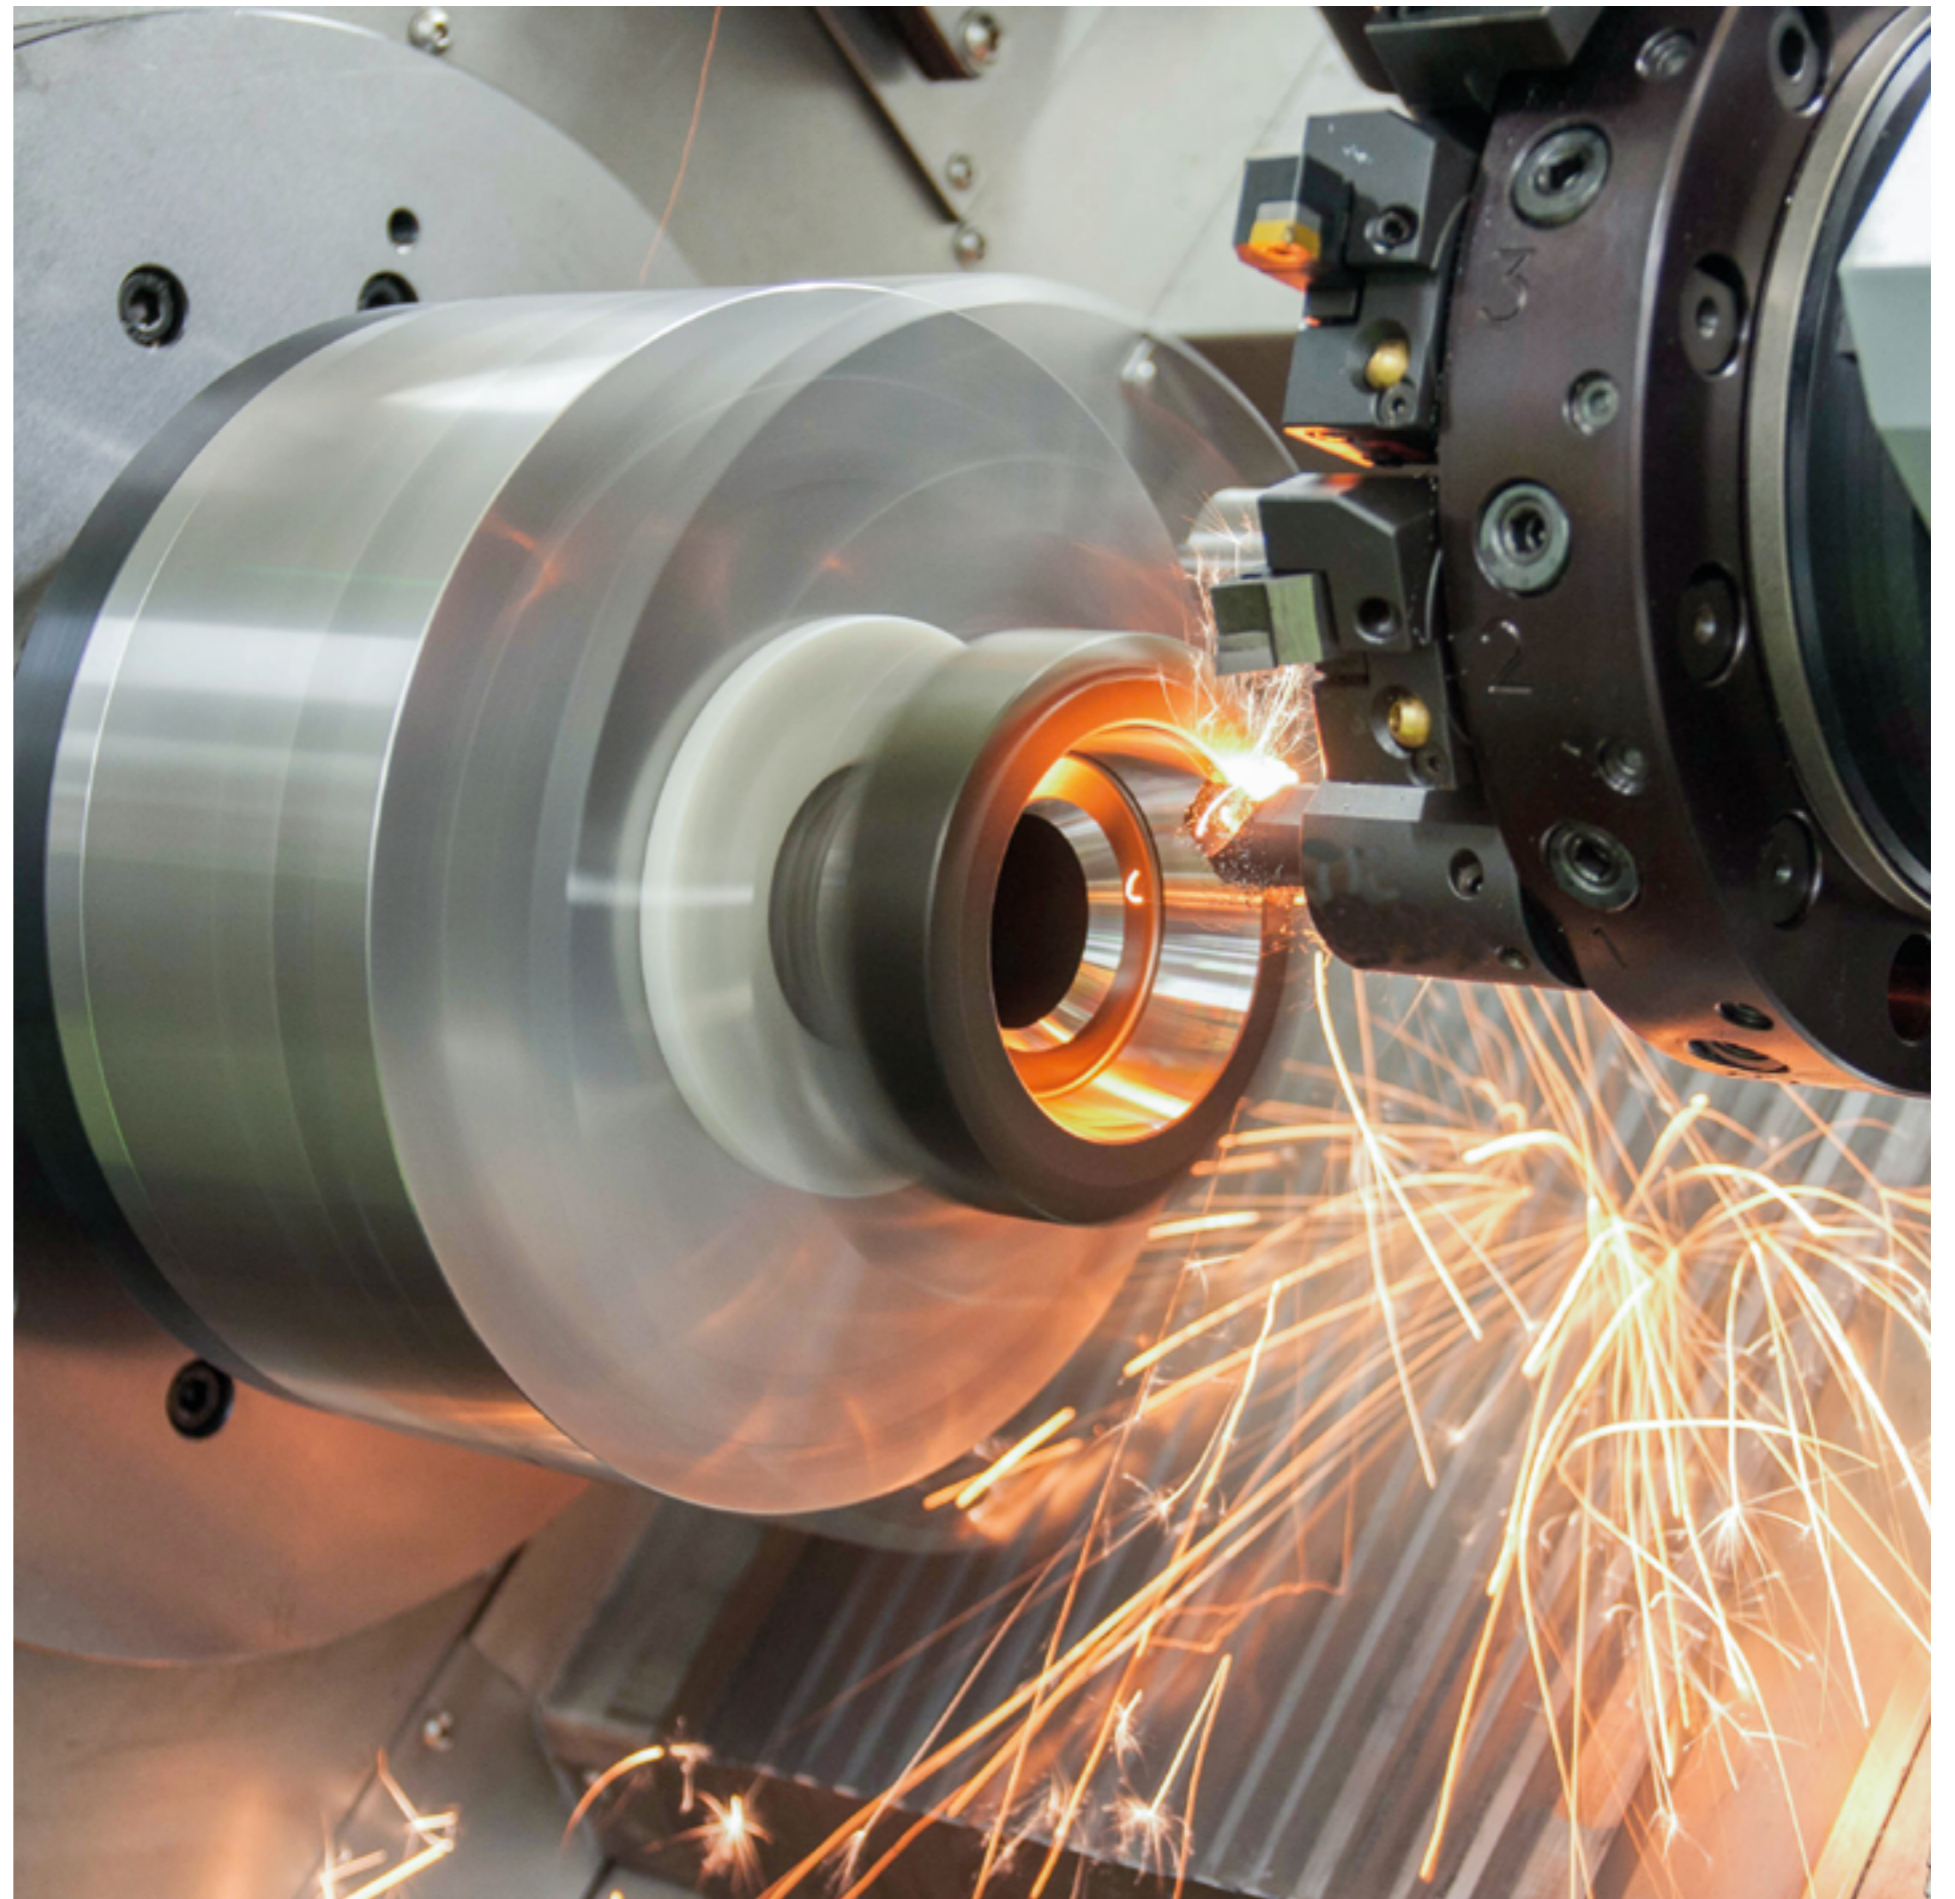

Applications



The Mikroturn® 100 series offer the highest finish hard turning accuracy levels on the market and contribute to a reliable and optimised production process. A process with low cycle times, (sub)-µm workpiece quality and a high flexibility with as few process steps as possible.

The Mikroturn® machines are used worldwide by leading companies for machining high precision workpieces such as:


- Ball screw nuts
- Bearings rings and roller bearings
- Hydraulic components
- Drive shafts and gear wheels
- Various mold & die components

Suitable materials

- Bearing steels such as 100Cr6
- High speed steels
- Die steels
- Case hardened steels
- Carbide
- Exotic materials such as Inconel

Achievable tolerances in hardened steel workpieces up to 70 HRC

- Form accuracies: < 2 µm
- Shape accuracies: 0.1 – 2 µm
- Surface finish (Ra): 0.1 – 0.4 µm

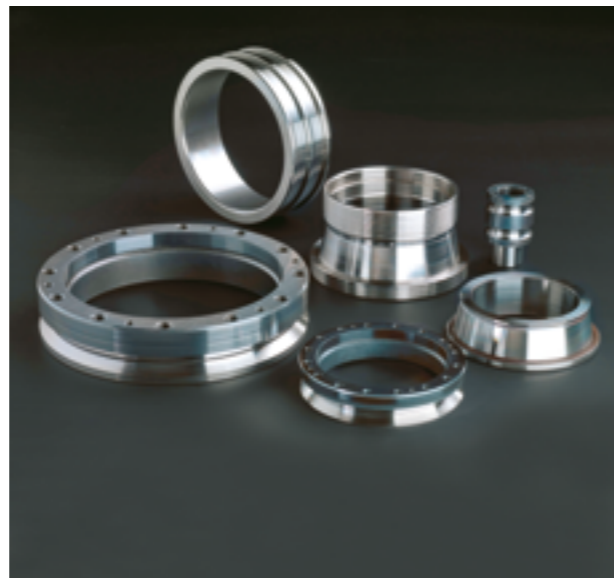

The Mikroturn® 100 machine series

The Mikroturn® 100 machine series is designed to meet the highest requirements in the field of static and dynamic stiffness, thermal stability and geometrical precision. They offer the highest finish hard turning precision levels available on the market. A large number of available options ensure that every machine can be fully adapted to your needs.



Mikroturn® Baseline

- The entry level Mikroturn® machine for workpieces up to Ø 380 mm
- Equipped with a Fanuc 01 control



Mikroturn® 100

- For small to medium sized workpieces up to Ø 380 mm or Ø 200x350 mm between centers
- Equipped with a Siemens 840 SL or Fanuc 32i CNC control



Mikroturn® 100 XLS

- For long workpieces up to Ø 350 mm or 240x1000 mm between centers
- Equipped with a Siemens 840 SL or Fanuc 32i CNC control



Mikroturn® 100XLD

- For large and heavy workpieces up to Ø 610 mm
- Equipped with a Siemens 840 SL or Fanuc 32i CNC control

TECHNICAL SPECIFICATION

Max. turning diameter
 Max. turning diameter between centers
 Max. part weight / between centers
 Max. spindle speed
 Main spindle run-out
 Z-axis travel
 X-axis travel
 Rapid travers rate
 Max. feed rate
 Positioning accuracy
 Slide repeatability
 CNC resolution

Baseline

Ø 380 mm 200
 x 350 mm 50
 kg / 100 kg
 4.000 rpm
 0.15 µm
 350 mm
 240 mm
 12 m/min
 0-12 m/min
 1 µm
 0.2 µm
 0.1 µm

Mikroturn® 100

Ø 380 mm
 200 x 350 mm
 50 kg / 100 kg
 2.000/4.000/8.000 rpm
 0.1 µm
 350/450 mm
 240 mm
 12 m/min
 0-12 m/min
 1 µm
 0.2 µm
 0.1 µm

Mikroturn® 100 XLS

Ø 350 mm
 890 x 190 mm
 50 kg / 100 kg
 2.000/4.000/8.000 rpm
 0.1 µm
 890 mm
 190 mm
 12 m/min
 0-12 m/min
 2 µm
 0.2 µm
 0.01 µm

Mikroturn® 100XLD

Ø 610 mm
 -
 200 kg
 2.000 rpm
 0.2 µm
 350 mm
 340 mm
 12 m/min
 0-12 m/min
 1 µm
 0.2 µm
 0.01 µm

OPTIONS, AMONG OTHERS

- Air or magnetic operated clamping units
- Precision tailstock
- Steady rest
- 8 or 12 position tool turret
- Tool presetting probe
- Part probing system
- Automatic machine door opening
- Chip conveyor
- Fanuc 32i CNC control


Core technology

Proof of accuracy

Every Mikroturn® machine receives an internal acceptance test on a brass part. The required accuracies that every Mikroturn® machine must meet:

- Form accuracy 0.5 – 1 µm
- Surface finish Ra 0.015 – 0.03 µm
- Size accuracy ≤ 1 µm

The Mikroturn® 100 machine series is designed to meet the highest requirements in the field of static and dynamic stiffness, thermal stability and geometrical precision and are therefore able to offer (sub)-µm precision levels.

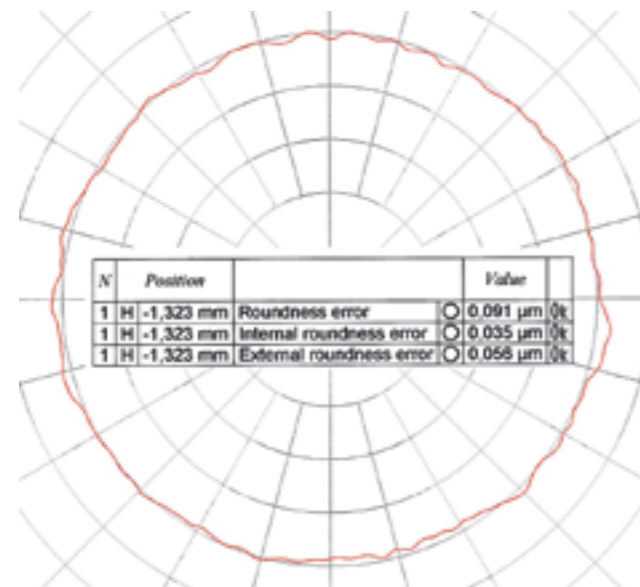

The chart shows a run-out of the main spindle of 0.09 µm at 3,200 rpm. This run-out accuracy was measured on a 17 year old Super-Mikroturn®. The Mikroturn® machines have an everlasting accuracy due to the absence of metal contact between the moving parts.


A stress free natural granite machine base

All Mikroturn® machines have a natural granite machine base with an integrated vibration damping system. Natural granite is the ideal machine base for a high precision machine. It is completely stress and corrosion free, has very good damping properties and offers a high thermal stability.

Wear free hydrostatic main spindle and guideways

All Mikroturn® machines are equipped with a hydrostatic main spindle and guideways. This in-house developed and produced system is far superior to any other conventional bearing system and offers many advantages:

- A new continuous oil film over the entire length of the guideways and bearing elements provides excellent damping properties, a high dynamic stiffness and ensures a long tool life
- Everlasting accuracy due to the absence of contact between moving components
- The temperature controlled oil flow guarantees a stable and reliable process, independent of the ambient temperature
- Due to the absence of the stick-slip effect smallest incremental steps of 0.01 µm are possible

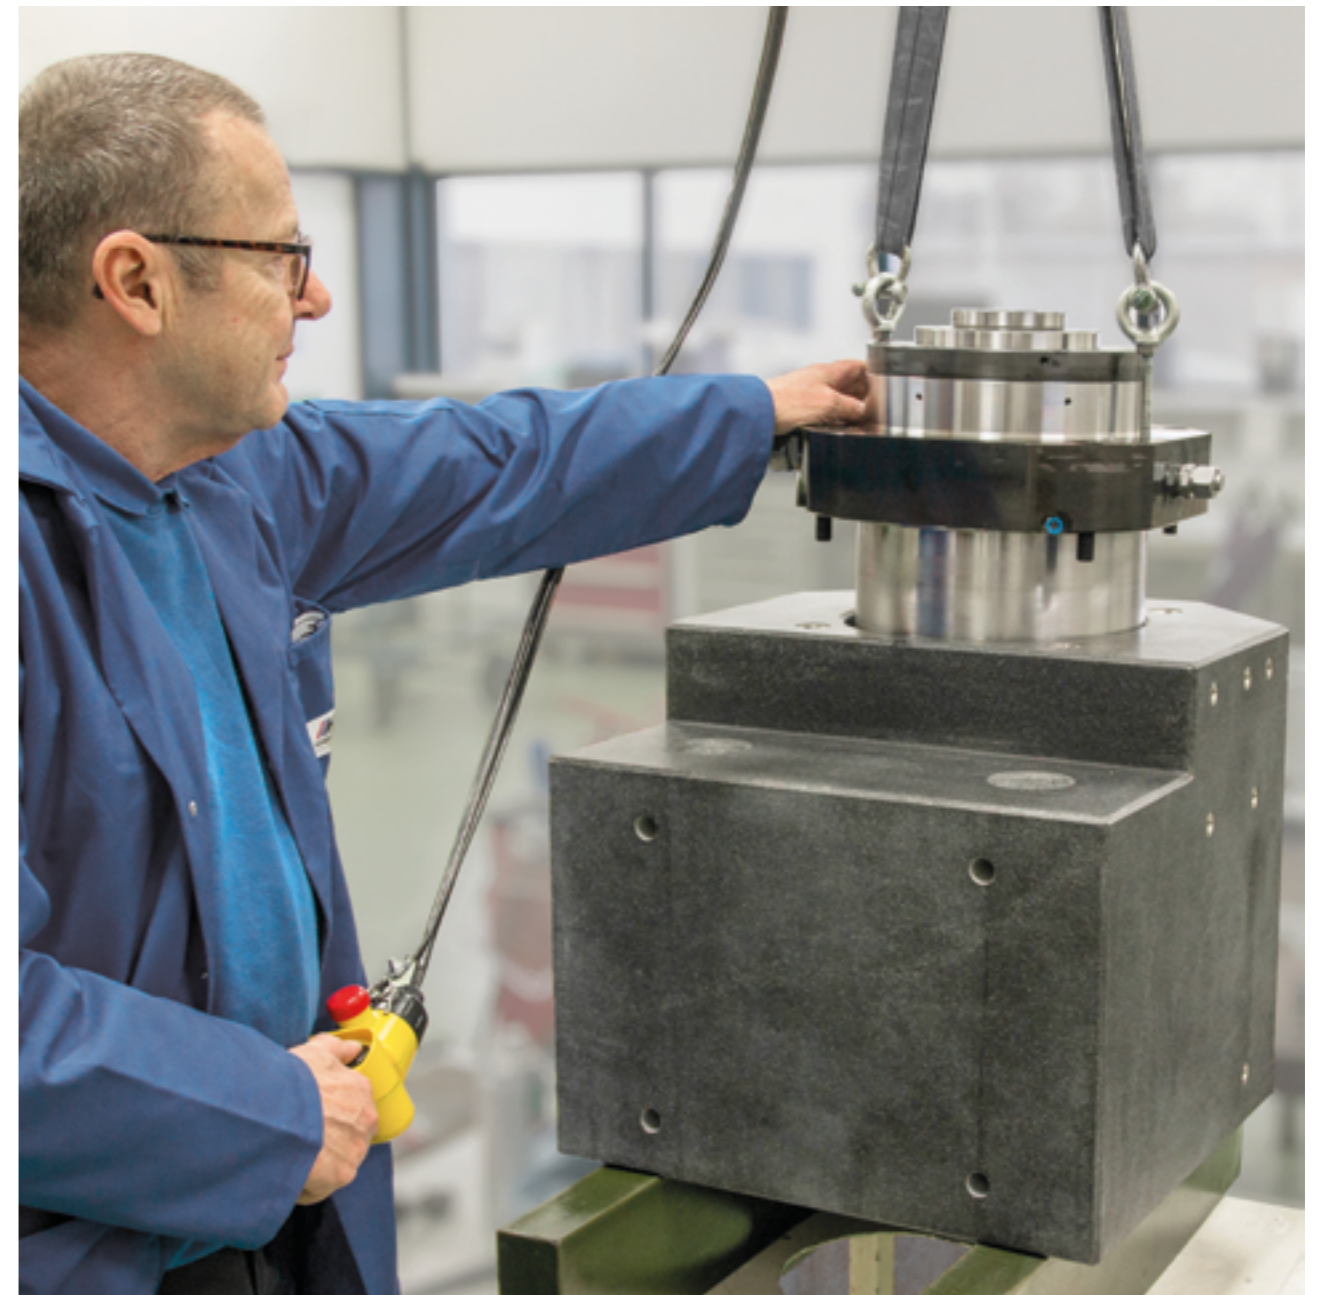

Innovative Solutions

Turnkey solutions

Hembrug offers customer specific, turn-key solutions in the area of automation and hard turning/fine grinding solutions. All solutions are based on proven technology and ensures an further increase in productivity with even shorter production times and improved workpiece quality.



Automated solutions


Hembrug provides various automation solutions, such as gantry loaders or robotized systems depending on the application. These solutions are delivered turn-key and also can be supplemented with post-process measuring systems.



Surface finishing options

When a surface quality and structure is required that cannot be achieved with hard turning, a grinding spindle or the stone finish technology, KombiFin, can be integrated. The KombiFin technology for instance incorporates a small stone finish unit that mount directly into the tool changer. The rotation of the workpiece and the movement of the stone finish unit are carried out by the hard turning machine. The oscillation of the stone tool and the contact force are controlled by the force sensing unit.

This way, hard turning and ultra-fine surface finishing can then take place on only one Mikroturm® machine. This saves even more process steps, costs and will result in a very low surface finish (< 0.3 µm Rz) and form accuracy (< 2 µm).

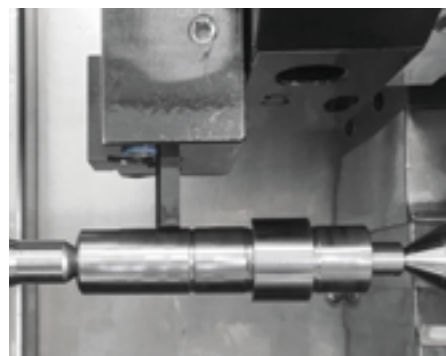

Advanced services

Hembrug offers worldwide an extensive range of maintenance and servicing options which accommodate the machine age, user level and the general machine state. A worldwide network of service engineers ensure that every Mikroturm® machine remains in top condition and optimal useful.



Turnkey solutions

- Corrective maintenance: a worldwide network of service engineers guarantees a quick response to machine problems or machine downtime
- Servicing on call. You decided if and when you want maintenance carried out
- Services on a contractual basis: By having maintenance carried out on a regular basis, malfunctions and machine stoppages are kept to a minimum
- Tele-service: a VPN connection allows us to connect to your machine allowing us to solve CNC control related problems without the need for engineer visit



Other services

- Advanced training: extensive and tailored training options in the area of programming and machine operation contributes to the workpiece quality and continuity of your production process
- OEM parts: A wide stock of original spare parts are ready to be dispatched immediately from different warehouses around the world
- Production optimisation: due to new workpieces or changed production requirements the configuration of your machine may no longer be suitable. Together with you we will examine how we can modify the machine to any new requirements so that process continuity is guaranteed
- Retrofitting: if the CNC operating system is outdated, malfunctions will occur with growing frequency as a result. In addition, it will also no longer be possible to guarantee the constant supply of spare parts. Retrofitting is therefore an economically appealing alternative to a complete new machine



Innovative Solutions

About Hembrug Machine Tools

Hembrug Machines Tools develops and manufactures high precision, fully hydrostatic finish hard turning machines and hybrid machines with hard turning and finish grinding capabilities. Hembrug is very solution-oriented, committed to providing machining solutions suited to a wide variety of production requirements. The Mikroturn® machines offer the highest accuracy levels on the market and are supplied worldwide to renowned companies in among others the bearing industry, machine construction and the tool and mould making.

Since September 2019 Hembrug is part of the Spanish machine tool manufacturer Danobat. Danobat designs, manufactures and supplies grinding machines and turning machines, as well as complete turnkey lines for the manufacturing of high added-value components. The Hembrug headquarters with 65 workers is located in Haarlem, the Netherlands. Hembrug also has a sales office in North America and works together with a variety of sales agents around the world.



NETHERLANDS
H. Figeeweg 1A+B
2031BJ Haarlem
The Netherlands
+31 (0)23 512 49 00
sales@hembrug.com
www.hembrug.com

DANOBATGROUP

